

**LONG HAUL**

**PSL1<sup>ET</sup>**

An advanced long haul steer tire that prioritizes sustainability and delivers exceptional performance.

**1. Extended Lifespan**

Continuous shoulder rib with decoupling groove promotes even wear and increases mileage over the life of the tire

**2. Stone Drilling Protection**

Stone ejector grooves effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability

**3. Exceptional Wet Braking**


Innovative groove and rib siping improves wet braking and handling

**4. Value Engineered Casing**

Durable casing design delivers dependable performance and long-term cost savings



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143L	20	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	503	118	1S+4S
11R24.5	16H	149/146L	20	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	477	126	1S+4S
295/75R22.5	14G	144/141L	20	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	520	113	1S+4S
295/75R22.5	16H	149/146L	20	7160	123	6610	123	9.00	8.25, 9.00	39.9	11.7	520	113	1S+4S

All specifications subject to change

**PSL1<sup>ET</sup>** is EPA SmartWay<sup>®</sup> verified for today's heavier, modern trucks, excelling in the most challenging long haul applications.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**REGIONAL ALL-POSITION**

**AR602<sup>ET</sup>**

A premium 5-rib tire that prioritizes sustainability and is perfect for any regional trucking application.

**1. Exceptional Wet Traction**

5-rib / 4-groove design, maximizes evacuation and braking in wet conditions

**2. Superior Wear Pattern**

Edge sipes along the outside grooves help ensure even treadwear

**3. Enhanced Traction & Heat Dispersion**

Sipes across the central rib facilitate better grip and help tires run cooler

**4. Stone Drilling Protection**


Stone ejector grooves effectively prevent stone drilling—preserving casing integrity and ensuring maximum retreadability

**5. Reduced Chafing and Wear**

Optimized bead bundle provides improved durability and performance



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
10R22.5	14G	141/139L	18	5675	115	5355	115	7.50	6.75, 7.50, 8.25	40.1	10.0	516	100	1S+4S
11R22.5*	14G	144/142L	18	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	501	111	1S+4S
11R22.5*	16H	146/143L	18	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	501	111	1S+4S
11R24.5*	14G	146/143L	18	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	478	120	1S+4S
11R24.5*	16H	149/146L	18	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	478	120	1S+4S
215/75R17.5	16H	135/133L	15	4805	125	4540	125	6.00	6.00, 6.75	30.2	8.3	681	58	1S+4S
235/75R17.5	18J	143/141J	15	6005	125	5675	125	6.75	6.75, 7.50	31.4	9.2	662	67	1S+4S
245/70R17.5	18J	136/134M	17	4940	125	4675	125	7.50	6.75, 7.50	31.1	9.8	670	70	1S+4S
245/70R17.5	18J	143/141J	17	6005	125	5675	125	7.50	6.75, 7.50	31.1	9.8	670	70	1S+4S
225/70R19.5^	12F	125/123N	15	3640	95	3415	95	6.75	6.00, 6.75	31.9	8.9	648	65	1S+3S
225/70R19.5^	14G	128/126N	15	3970	110	3750	110	6.75	6.00, 6.75	31.9	8.9	648	65	1S+3S
245/70R19.5	14G	133/131N	16	4540	110	4300	110	7.50	6.75, 7.50	33.0	9.8	627	72	1S+4S
245/70R19.5	16H	136/134N	16	4940	120	4675	120	7.50	6.75, 7.50	33.0	9.8	627	72	1S+4S
265/70R19.5	14G	137/134M	18	5070	110	4675	110	7.50	7.50, 8.25	34.1	10.3	605	83	1S+4S
255/70R22.5	16H	140/137M	17	5510	120	5070	120	7.50	7.50, 8.25	36.6	10.0	567	85	1S+4S
275/70R22.5	18J	148/145L	18	6940	130	6395	130	8.25	8.25, 9.00	37.7	10.9	546	106	1S+4S
295/75R22.5*	14G	144/141L	18	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	519	106	1S+4S
295/75R22.5*	16H	146/143L	18	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	519	106	1S+4S
285/75R24.5*	14G	144/141L	18	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	503	112	1S+4S
285/75R24.5*	16H	147/144L	18	6780	120	6175	120	8.25	7.50, 8.25, 9.00	41.3	11.1	503	112	1S+4S

\*Select sizes are SmartWay® verified  
 ^3 - belt construction

All specifications subject to change

**AR602<sup>ET</sup>** is EPA SmartWay® verified for low rolling resistance (LRR), reducing emissions and fuel use by more than 3%.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



REGIONAL

# AR603

An all-weather motorcoach tire, that handles impeccably and is celebrated for its durability.

**1. Alignment-Friendly**

Markings located on the solid shoulders readily identify any vehicle alignment issues

**2. Exceptional Wear Pattern**

Multi-angle grooves contribute to tread rigidity—and combined with optimized rib widths, provide a more uniform wear pattern

**3. Superior Traction**


Specialized siping improves grip with a consistent, regular footprint

**4. Performance Rated**

This tire is 3PMS certified and L-speed rated up to 75 MPH



**APPLICATION**



**QUALIFICATIONS**



Practical performance for the long haul.

**VIEW ONLINE**



Scan to see our full lineup



[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
315/80R22.5	20L	161/157L	20	10000	130	9090	130	9.00	9.00, 9.75	42.4	12.3	488	147	1S+4S

All specifications subject to change

**AR603** is 3PMS-rated for superior value-tier performance across a mix of rain, heat, and snow.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**LONG HAUL**

**DH106<sup>ET</sup>**

A durable closed shoulder, drive tire with a deep, modern, tread design and remarkable long haul lifespan.

**1. Extended Lifespan**

Closed shoulder design and deep tread depth of 30/32nds promotes even wear and increases mileage over the life of the tire

**2. Stone Drilling Protection**

Stone ejector grooves effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability

**3. Exceptional Traction & Mileage**


Specialized tread blocks add stability, grip and overall durability

**4. Better Starts & Stops**

Optimized siping enhances starts, acceleration, and braking



**APPLICATION**



**QUALIFICATIONS**



**Practical  
performance  
for the  
long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	30	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	493	133	1S+4S
11R22.5	16H	146/143L	30	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	493	133	1S+4S
11R24.5	14G	146/143L	30	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	471	142	1S+4S
11R24.5	16H	149/146L	30	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	471	142	1S+4S
295/75R22.5	14G	144/141L	30	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	508	130	1S+4S
295/75R22.5	16H	146/143L	30	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	508	130	1S+4S
285/75R24.5	14G	144/141L	30	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	494	134	1S+4S
285/75R24.5	16H	147/144L	30	6780	120	6175	120	8.25	7.50, 8.25, 9.00	41.3	11.1	494	134	1S+4S

All specifications subject to change

**DH106<sup>ET</sup>** is EPA SmartWay<sup>®</sup> verified for low rolling resistance (LRR), reducing emissions and fuel use by more than 3%.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**LONG HAUL**

**DH131**

A closed shoulder drive tire built for regional highway use that prioritizes value and overall dependability.

**1. Optimized Performance**

Closed shoulder design facilitates high-speed performance, increases mileage, and minimizes wear

**2. Exceptional Traction**

Specialized tread blocks increase surface area and tire grip

**3. Enhanced Heat Dispersion**


Unique siping helps tires run cooler

**4. Stone Drilling Protection**

Stone ejector grooves effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	26	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	495	121	1S+4S
11R22.5	16H	146/143L	26	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	495	121	1S+4S
11R24.5	14G	146/143L	26	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	472	130	1S+4S
11R24.5	16H	149/146L	26	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	472	130	1S+4S
295/75R22.5	14G	144/141L	26	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	513	114	1S+4S
295/75R22.5	16H	146/143L	26	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	513	114	1S+4S

All specifications subject to change

**DH131** delivers the perfect combination of value and practical performance for a regional drive tire.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**REGIONAL**

# DR601<sup>ET</sup>

An open shoulder drive tire for challenging conditions that require added traction and control.

**1. Added Traction**

Open shoulder design, with exposed tread blocks, improves grip along outer edges of the tire

**2. Exceptional Wear Pattern**

Tie-bar linked tread blocks prevent irregular wear

**3. Structurally Enhanced**


Unique siping helps maintain block rigidity and overall integrity of the tire

**4. Superior Durability**

Robust 4-belt construction preserves the casing and ensures maximum retreadability



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5*	14G	144/142L	26	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	495	118	1S+4S
11R22.5*	16H	146/143L	26	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	495	118	1S+4S
11R24.5*	14G	146/143L	26	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	475	130	1S+4S
11R24.5*	16H	149/146L	26	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	475	130	1S+4S
225/70R19.5^	14G	128/126N	19	3970	110	3750	110	6.75	6.00, 6.75	31.9	8.9	645	65	1S+3S
245/70R19.5	14G	133/131N	19	4540	110	4300	110	7.50	6.75, 7.50	33.0	9.8	624	72	1S+4S
295/75R22.5*	14G	144/141L	26	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	510	115	1S+4S
295/75R22.5*	16H	146/143L	26	6610	120	6005	120	9.00	8.25, 9.00	39.9	11.7	510	115	1S+4S
285/75R24.5*	14G	144/141L	26	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	498	119	1S+4S
285/75R24.5*	16H	147/144L	26	6780	120	6175	120	8.25	7.50, 8.25, 9.00	41.3	11.1	498	119	1S+4S

\*Select sizes are SmartWay® verified  
^3 - belt construction

All specifications subject to change

**DR601<sup>ET</sup>** is EPA SmartWay® verified for low rolling resistance (LRR), reducing emissions and fuel use by more than 3%.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**WINTER DRIVE**

**PDW1**

A premium, winter drive tire built to perform flawlessly in snow and ice across regional highways and roads.

**1. Special Winter Tread Compound**

Unique mixture provides enhanced ice and snow performance

**2. Exceptional Ice & Snow Traction**

Three main zigzag grooves and two auxiliary grooves ensure tread stiffness and handling

**3. Superior Snow Removal**

3PMS-rated, open shoulder groovedesign increases the snowremoval and anti-sideslip capability of the tire

**4. Exceptional Wear Pattern**


Tie-bar linked tread blocks prevent irregular wear when tires are newer, and enhanced, full-depth, 3D siping helps maintain grip as tires age

**5. Optimized Footprint**

Engineered shoulder block ratio and tread design, combined with high tension steel belts, reduce tread deformation in the footprint leading to better traction



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143L	27	6610	120	6610	120	8.25	7.50, 8.25	41.9	11.0	497	130	1S+4S
11R24.5	16H	149/146L	27	7160	120	6610	120	8.25	7.50, 8.25	43.9	11.0	474	139	1S+4S
225/70R19.5^	14G	128/126N	21	3965	110	3745	110	6.75	6.00, 6.75	32.2	8.9	644	68	1S+3S
245/70R19.5	16H	135/133N	21	4805	120	4540	120	7.50	6.75, 7.50	33.3	9.8	627	81	1S+4S
295/75R22.5	16H	146/143L	27	6610	120	6005	120	9.00	8.25, 9.00	30.8	11.7	510	129	1S+4S

All specifications subject to change

**PDW1** boasts an open shoulder groove design that effectively flushes out snow and slush to increase contact with the road.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**LONG HAUL TRAILER**

**TH107<sup>ET</sup>**

A dependable, highly efficient, long haul trailer tire that prioritizes stability and consistent performance.

**1. Extended Lifespan**

Optimized shoulder design improves mileage over the life of the tire

**2. Stone Drilling Protection**

Stone ejectors effectively prevent stone drilling—preserving the casing and ensuring maximum retreadability

**3. Enhanced Heat Dispersion**

Unique siping helps tires run cooler

**4. Streamlined Wear Pattern**


Optimized footprint for low rolling resistance and even wear

**5. Increased Wet Traction**

5-rib / 4-groove design, maximizes water evacuation and braking in wet conditions



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	12	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	507	104	1S+4S
11R24.5	14G	146/143L	12	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	483	112	1S+4S
295/75R22.5	14G	144/141L	12	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	524	100	1S+3S
285/75R24.5	14G	144/141L	12	6175	110	5675	110	8.25	7.50, 8.25, 9.00	41.3	11.1	507	105	1S+4S

All specifications subject to change

**TH107<sup>ET</sup>** is EPA SmartWay<sup>®</sup> verified for low rolling resistance (LRR), reducing emissions and fuel use by more than 3%.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**SEVERE SERVICE TRAILER**

**PTL1**

A severe service, spread-axle trailer tire that is engineered for high-scrub, extreme hauling conditions.

**1. Spread-Axle Optimized**

Specialized shoulder design disperses lateral forces generated during sharp turning

**2. Structurally Enhanced**

Zigzag grooves improve the stability of the shoulder pattern blocks and minimize lateral force impact

**3. Increased Wet Traction**

Shoulder groove gradient design improves water dispersion

**4. Stone Drilling Protection**

Stone ejectors effectively prevent stone drilling—preserving the casing integrity and ensuring maximum retreadability

**5. High-Load Optimized**

Big bead filler, and high-strength rim cushion handles heavy spread axle loads



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup



prinxtireusa.com



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	14G	144/142L	16	6175	105	5840	105	8.25	7.50, 8.25	41.5	11.0	506	113	1S+4S
11R22.5	16H	146/143L	16	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	506	113	1S+4S
11R24.5	14G	146/143L	16	6610	105	6005	105	8.25	7.50, 8.25	43.5	11.0	482	121	1S+4S
11R24.5	16H	149/146L	16	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	482	121	1S+4S
255/70R22.5	16H	140/137L	16	5510	120	5070	120	7.50	7.50, 8.25	36.6	10.0	570	87	1S+4S
295/75R22.5	14G	144/141L	16	6175	110	5675	110	9.00	8.25, 9.00	39.9	11.7	520	108	1S+4S
295/75R22.5	16H	149/146L	16	7160	123	6610	123	9.00	8.25, 9.00	39.9	11.7	520	108	1S+4S

All specifications subject to change

**PTL1** uses an advanced compound for high-scrub applications unique to the spread-axle tire.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**MIXED SERVICE**

# AM210

A heavy duty, all-position tire designed to be the workhorse of your on/off-road mixed service fleet.

**1. Chip & Cut Resistant**

Special compound yields longer tire life and resistance to scrapes, chips, and cuts

**2. Improved Wear Pattern**

Unique 4-rib pattern streamlines tread wear

**3. Added Traction**

Zigzag design improves grip

**4. Extended Lifespan**

Advanced wear resistant compound and low void ratio improves mileage over the life of the tire

**5. Balanced Tread**

Optimized footprint for improved weight distribution



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup

[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143K	24	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	499	119	1S+4S
11R24.5	16H	149/146K	24	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	477	128	1S+4S
255/70R22.5	16H	140/137L	22	5510	120	5070	120	7.50	7.50, 8.25	36.6	10.0	565	96	1S+4S
275/70R22.5	18J	148/145K	23	6940	130	6395	130	8.25	8.25, 9.00	37.7	10.9	543	113	1S+4S
315/80R22.5	20L	161/157K	24	10000	130	9090	130	9.00	9.00, 9.75	42.4	12.3	485	144	1S+4S
315/80R22.5 <sup>^</sup>	20L	161/157K	22	10200	130	9090	130	9.00	9.00, 9.75	42.4	12.3	487	150	1S+4S

\*M+S rated size

<sup>^</sup>AM210-A 5-rib design (new for 2025)

All specifications subject to change

**AM210** is designed for a mixed service fleet that includes cement mixers and refuse, mining, and logging vehicles.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)

**AM210-A** features an extra wide 5-rib design.



**MIXED SERVICE**

**AM211**

A wide base, all-position, mixed service tire that capably handles any on/off-road assignment.

**1. Chip & Cut Resistant**

Special compound yields longer tire life and resistance to scrapes, chips, and cuts

**2. Enhanced Heat Dispersion**

Unique crown groove help tires run cooler

**3. Improved Wear Pattern**

Tie-bar linked tread blocks prevent irregular wear

**4. Improved Traction**

Specialized tread blocks increase surface area and tire grip

**5. Increased Durability**

Robust 4-belt construction preserves the casing and ensures maximum retreadability

**6. Improved Stability**

445/65R22.5 features a zero degree steel belt for improved stability under heavy loads



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup



[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
385/65R22.5	20L	160K	23	9920	130	NA	NA	11.75	11.75, 12.25	42.2	15.3	494	170	1S+4S
425/65R22.5	20L	165K	23	11400	120	NA	NA	12.25	11.75, 12.25, 13.00	44.3	16.6	470	195	1S+4S
445/65R22.5^	22M	169K	24	12800	130	NA	NA	13.00	13.00, 14.00	45.3	17.5	458	217	1S+5S

^5 - belt construction

All specifications subject to change

**AM211** is designed for a mixed service fleet that includes cement mixers and refuse, mining, and logging vehicles.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



MIXED SERVICE

**DM212**

The most aggressive, rugged, all-weather, open shoulder drive tire in our mixed service lineup.

**1. Chip & Cut Resistant**

Special compound yields longer tire life and resistance to scrapes, chips, and cuts

**2. Structurally Enhanced**

Casing design provides increased durability and optimal weight distribution

**3. Aggressive Traction**

Extra-deep grooves facilitate maximum tire grip

**4. Stone Drilling Resistant**

Tread base design is effective in ejecting stones to prevent casing damage

**5. Optimized Performance**

Low void design for enhanced driving performance in extreme conditions

**6. Increased Durability**

Robust 4-belt construction preserves the casing and ensures maximum retreadability



**APPLICATION**



**QUALIFICATIONS**



**Practical performance for the long haul.**

**VIEW ONLINE**



Scan to see our full lineup  
[prinxtireusa.com](http://prinxtireusa.com)



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143K	29	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	494	124	1S+4S
11R24.5	16H	149/146K	29	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	476	134	1S+4S

All specifications subject to change

**DM212** is all-weather rated for a mixed service fleet that includes construction and logging vehicles.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**MIXED SERVICE**

# PDM1

A mixed service tire with extra-deep tread designed for reliability service and efficient performance.

**1. Chip & Cut Resistant**

Special compound yields longer tire life and resistance to scrapes, chips, and cuts

**2. Optimized Tread Design**


Offers even wear distribution, without sacrificing grip and stability

**3. Stone Drilling Protection**

Stone ejector grooves effectively prevent stone drilling-preserving casing integrity and ensuring maximum retreadability

**4. Superior Durability**

33/32nd tread depth extends tire life and reduces frequency of replacements

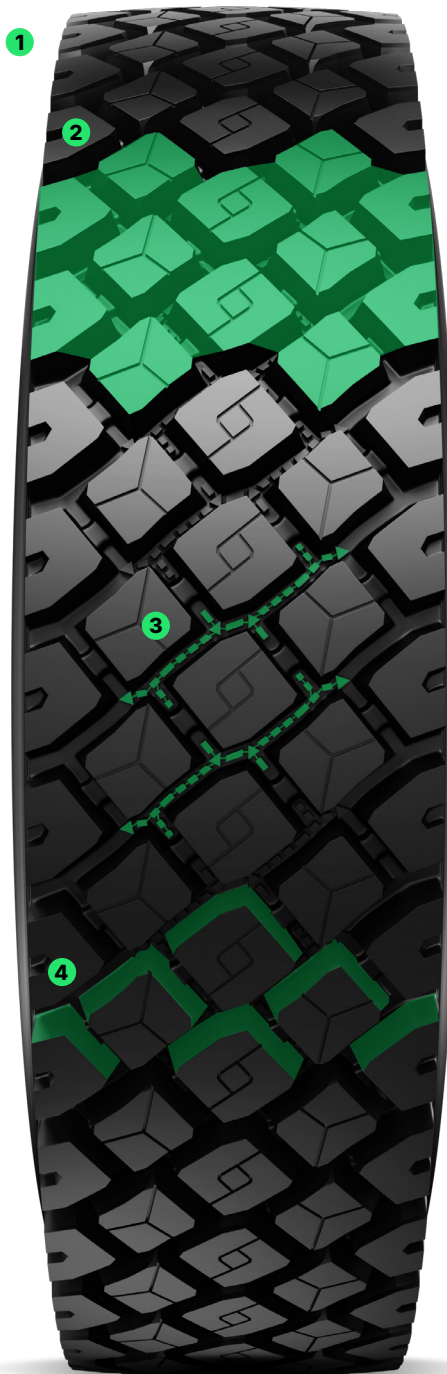

**APPLICATION**



**QUALIFICATIONS**



**Practical  
performance  
for the  
long haul.**

**VIEW ONLINE**



Scan to see our full lineup



prinxtireusa.com



## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	146/143K	32	6610	120	6005	120	8.25	7.50, 8.25	41.5	11.0	493	136	1S+4S
11R24.5	16H	149/146K	32	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	470	145	1S+4S

All specifications subject to change

**PDM1** is smart choice for those who value longevity and performance in tough environments.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)



**MIXED SERVICE**

**DO305**

A mixed service drive tire designed for intense load, puncture resistance, and low heat buildup.

**1. Chip & Cut Resistant**

A specialized compound provides superior resistance to chips and cuts while reducing heat buildup—helping extend tread life.

**2. Aggressive Traction Design**


Large tread blocks and deep grooves deliver strong grip and stable handling across mixed and off-road surfaces.

**3. Stone Ejection Protection**


Integrated rock ejectors help prevent stone retention, protecting the casing and enhancing long-term durability.

**4. Reinforced Bead Construction**

Engineered to handle heavy loads by reducing stress and heat, improving durability, and maximizing retreadability.

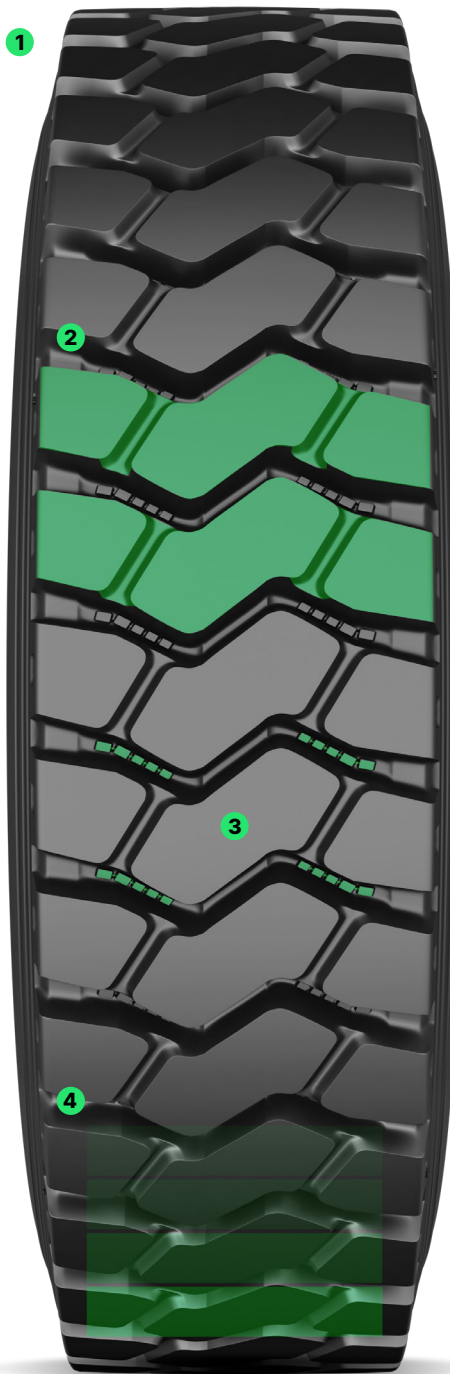

**APPLICATION**



**QUALIFICATIONS**



**Practical  
performance  
for the  
long haul.**

**VIEW ONLINE**



Scan to see our full lineup



[prinxtireusa.com](http://prinxtireusa.com)




## 7-YEAR / 3-RETREAD WARRANTY

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
11R22.5	16H	148/145K	30	6940	125	6390	125	8.25	7.50, 8.25	41.5	11.0	506	133	1S+4S
11R24.5	16H	149/146K	30	7160	120	6610	120	8.25	7.50, 8.25	43.5	11.0	481	141	1S+4S

All specifications subject to change

**DO305** is engineered for demanding mixed-service conditions across a wide range of applications, delivering reliable drive performance.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)

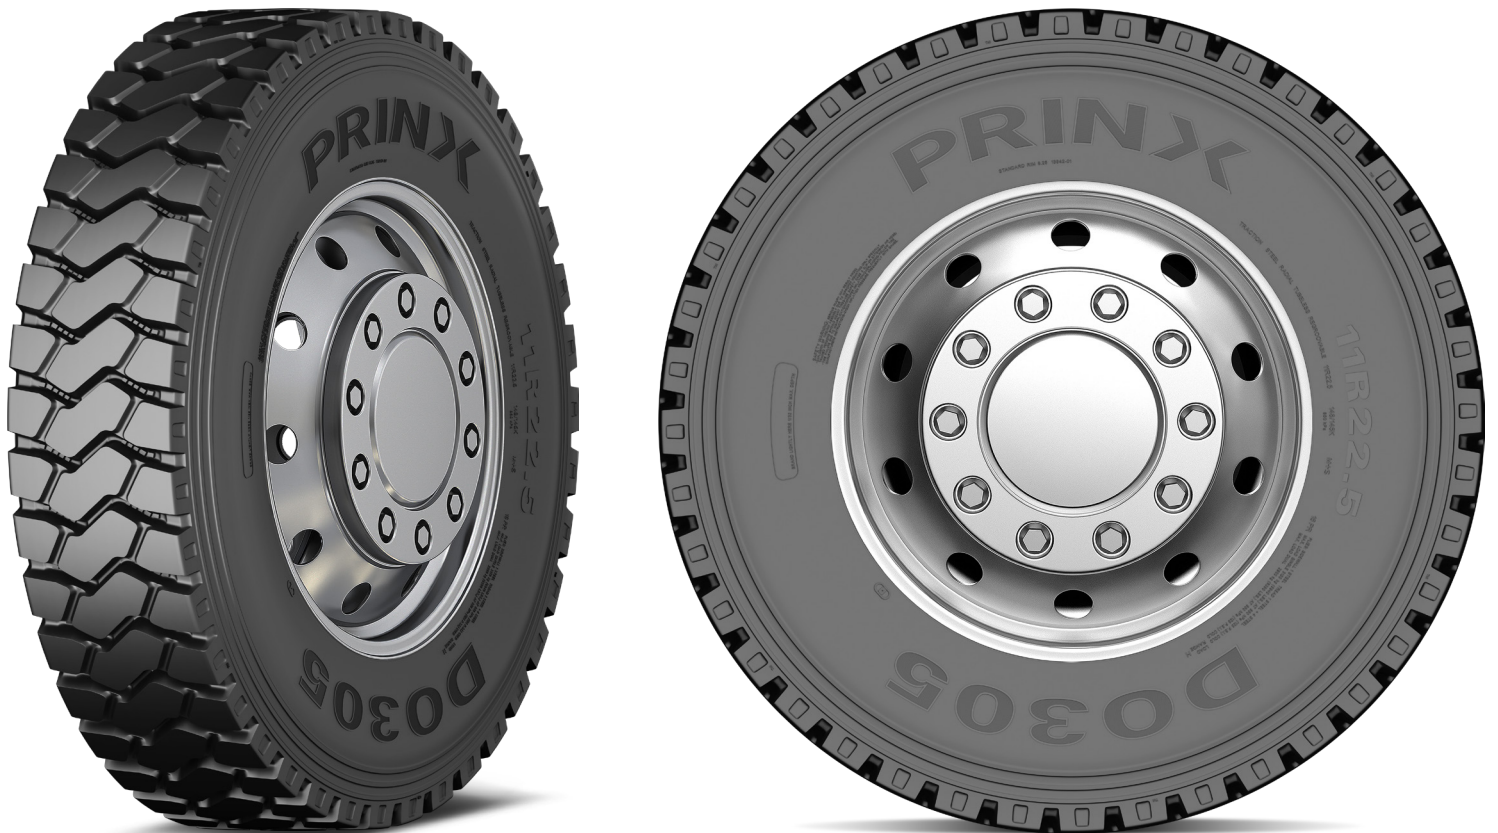

HEAVY DUTY TRAILER

# ST02

A heavy duty, all-steel specialty trailer tire with increased load-bearing capacity and outstanding durability.

**1. Enhanced Durability**


New polybutadiene rubber and optimized footprint shape ensures excellent wear-resistance performance

**2. Increased Traction**

Unique sipe distribution offers good tire traction, handling and safety

**3. Stone Drilling Protection**

Optimized tread groove geometry enhances stone ejection and reduces stone retention

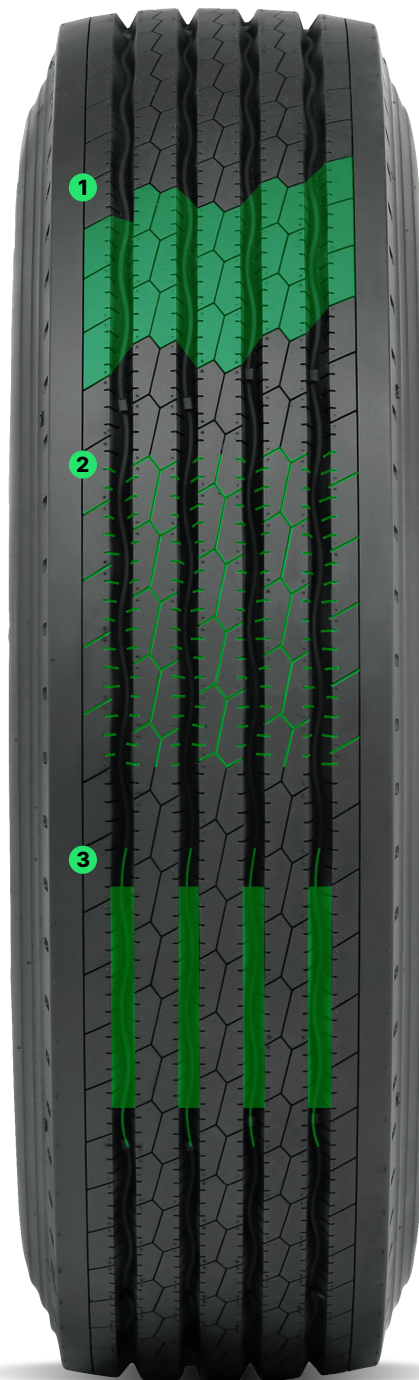

**APPLICATION**



**QUALIFICATIONS**



- For trailer use only

Practical  
performance  
for the  
long haul.

**VIEW ONLINE**



Scan to see our  
full lineup

[prinxtireusa.com](http://prinxtireusa.com)



©2026 Prinx Chengshan Tire  
North America, Inc.

TIRE SIZE	PR/ LOAD RANGE	LOAD SPEED INDEX	TREAD DEPTH (32NDS)	MAX LOAD SINGLE (LBS)	MAX PRESSURE SINGLE (PSI)	MAX LOAD DUAL (LBS)	MAX PRESSURE DUAL (PSI)	MEASURING RIM	APPROVED RIM WIDTH (IN)	O.D. (IN)	S.W. (IN)	REVS/ MILE	WEIGHT (LBS)	TREAD CONSTRUCTION
ST225/90R16	14G	129/125L	13	4080	110	3640	110	6	6.00 - 7.00	31.8	8.7	654	60	1S+3S
ST235/85R16	14G	132/127L	12	4400	110	3860	110	6.5	6.00 - 7.50	31.7	9.3	657	61	1S+3S
ST235/80R16	14G	129/125L	12	4080	110	3640	110	6.5	6.00 - 8.00	30.8	9.3	675	60	1S+3S

All specifications subject to change

**ST02** delivers the perfect combination of value and practical performance for a heavy duty specialty trailer tire.

Contact a sales representative at [prinxtireusa.com/dealer-contact](http://prinxtireusa.com/dealer-contact)

